



AT2020 USB
Cardioid Condenser Microphone

AT2020 USB

Cardioid Condenser Microphone

Introducing the new standard for quality digital recording.

Designed for computer-based recording, the new AT2020 USB cardioid condenser microphone is ideal for digitally capturing music or any acoustic audio source using your favorite recording software. Equipped with a USB digital output, the AT2020 USB offers studio-quality articulation and intelligibility perfect for home studio recording, field recording, podcasting, and voiceover use.

Based on the design of Audio-Technica's critically acclaimed AT2020 cardioid condenser microphone, the AT2020 USB features a low-mass diaphragm, custom-engineered for extended frequency response and superior transient response. Audio-Technica's state-of-the-art design and manufacturing techniques ensure that the microphone complies with the company's renowned consistency and reliability standards.

- **Side-address cardioid condenser with USB digital output** (Windows and Mac compatible)
- **Ideal for podcasting, home studio recording, field recording, and voiceover use**
- **Custom-engineered low-mass diaphragm provides extended frequency response and superior transient response**
- **Cardioid polar pattern reduces pickup of sounds from the sides and rear, improving isolation of desired sound source**
- **Low self-noise – perfectly suited for sophisticated digital recording equipment**
- **USB powered; connects directly to computer's USB input**
- **Pivoting, threaded stand mount attaches securely for easy and precise placement of the microphone**
- **Tripod desk stand with folding legs offers secure and easily portable tabletop base**



SPECIFICATIONS[†]


ELEMENT	Fixed-charge back plate permanently polarized condenser
POLAR PATTERN	Cardioid
FREQUENCY RESPONSE	20 - 16,000 Hz
BIT DEPTH	16 bit
SAMPLE RATE	44.1 kHz
POWER REQUIREMENTS	USB power (5V DC)
WEIGHT (less accessories)	13.2 oz (374 g)
DIMENSIONS	6.38" (162.0 mm) long, 2.05" (52.0 mm) maximum body diameter
OUTPUT CONNECTOR	USB-type connector
ACCESSORIES FURNISHED	Pivoting stand mount for 5/8"-27 threaded stands; 5/8"-27 to 3/8"-16 threaded adapter; soft protective pouch; tripod desk stand; 10' (3.1 m) USB cable

[†] In the interest of standards development, A.T.U.S. offers full details on its test methods to other industry professionals on request.


* 1 Pascal = 10 dynes/cm² = 10 microbars = 94 dB SPL

[†] Typical, A-weighted, using Audio Precision System One. Specifications are subject to change without notice.

Frequency Response

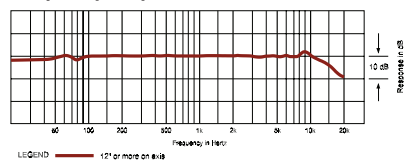

Polar Pattern



Audio-Technica U.S., Inc., 1221 Commerce Drive, Stow, Ohio 44224
 (330) 686-2600 Fax: (330) 686-0719 E-mail: pro@atus.com www.audio-technica.com